



Gripper Gasket LLC
 1660 Leeson Lane
 Corona, CA 92879
 (951) 479-4999 • Fax (951) 479-4997
maxadaptor.com

**MEETS:
 ASTM C 1173
 UPC 4224**


**The Only Universal Repair Coupling —
 ONE SIZE FITS ALL**

MAXADAPTOR™ Couplings - Submittal

Performance Sewer Repair Coupling

PROJECT _____
 ENGINEER _____
 CONTRACTOR _____


| MATERIALS | |
|---------------|---------------------------------|
| Shear Band | Series 304 ASTM stainless steel |
| Screw Housing | Series 304 ASTM stainless steel |
| Screw Saddle | Series 304 ASTM stainless steel |
| Screw | Series 305 ASTM stainless steel |
| Securing Cage | High impact polyamide (nylon) |
| Gasket | EPDM rubber |

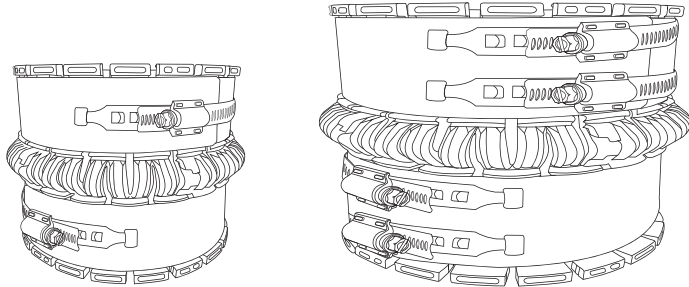


SIZES 4" THROUGH 10" - 2 CLAMPS

SIZE 12" - 4 CLAMPS


SEALING GASKET DETAILS

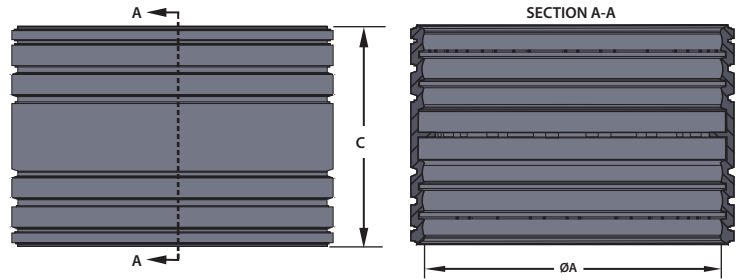


CLAMP ASSEMBLY DETAILS

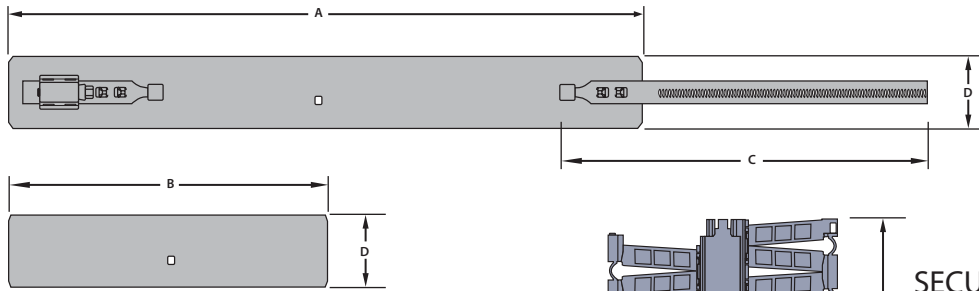

Band Thickness - .0315"



SECURING CAGE DETAILS

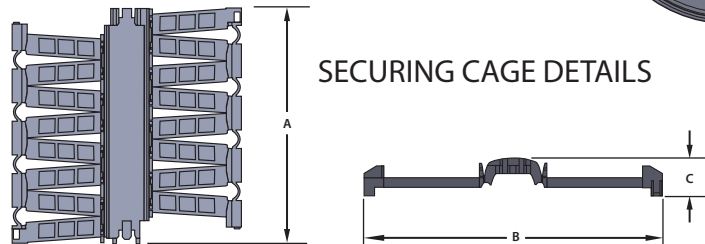

| MAXADATOR REFERENCE | SIZE | CLAMP ASSEMBLY | | | | SECURING CAGE | | | SEALING GASKET | | |
|---------------------|------|----------------|---------|---------|--------|---------------|--------|--------|----------------|---------|--------|
| | | A | B | C | D | A | B | C | ØA | ØB | C |
| MAX 4 | 4" | 16.732" | 8.465" | 9.843" | 1.929" | 5.250" | 5.900" | 0.910" | 5.285" | 4.420" | 5.345" |
| MAX 5 | 5" | 20.276" | 10.236" | 9.843" | 1.929" | 5.250" | 5.900" | 0.910" | 6.417" | 5.720" | 5.345" |
| MAX 6 | 6" | 22.835" | 11.614" | 9.843" | 1.929" | 6.400" | 6.200" | 0.790" | 7.575" | 6.895" | 5.935" |
| MAX 6 Oversize | 6"+ | 25.750" | 11.125" | 11.496" | 1.929" | 5.250" | 5.750" | .910" | 7.941" | 7.250" | 5.750" |
| MAX 7 | 7" | 26.000" | 13.250" | 9.843" | 2.323" | 5.250" | 5.750" | 0.910" | 8.628" | 8.500" | 6.375" |
| MAX 8 | 8" | 29.528" | 14.961" | 11.496" | 2.323" | 8.000" | 6.750" | 0.690" | 10.115" | 9.358" | 6.892" |
| MAX 10 | 10" | 36.417" | 18.504" | 11.496" | 2.323" | 8.000" | 6.750" | 0.690" | 12.625" | 11.470" | 6.788" |
| MAX 12 | 12" | 45.520" | 21.654" | 18.110" | 2.717" | 9.500" | 8.190" | 0.910" | 15.148" | N/A | 7.660" |

| TEST | GASKET PHYSICAL TESTS (ASTM C1173) | ASTM C1173 |
|---------------------|---|------------|
| Tensile Strength | 1000 PSI minimum | D412 |
| Elongation | 200% minimum | D412 |
| Durometer (Shore A) | 50 minimum 75 maximum | D2240 |
| Heat Aging | 75% of original tensile strength 65% of original elongation All determined after oven aging at 70°C for 70 hours | D573 |
| Ozone Cracking | No visible cracking at 2X magnification of the gasket after 24 hours exposure in 0.5 PPHM ozone concentrations at 40°C. Testing and inspection to be on gasket which is loop-mounted to give approximately 20% elongation of outer surface. | D1149 |
| Water Absorption | 20% maximum by weight after 7 days at 70°F | D471 |
| Chemical Resistance | No weight loss 48 hours at 74°F | D543 |

U.S. Patent Nos. US 8,651,532 B2 & US 8,635,747 B2

MAXADAPTOR™ Couplings are designed for the repair of most types and sizes of gravity flow, non-pressure sewer/drainage pipes. One coupling per nominal diameter joins clay, ductile iron, asbestos cement, cast iron and plastic. Coupling consists of corrosion resistant AISI 304 series stainless steel components, and a high impact polyamide (nylon) securing cage, over an injection molded EPDM rubber gasket. Couplings are available in sizes 4" through 12".

Leak-Proof Seal - AISI 304 series stainless steel components and high impact polyamide (nylon) securing cage provide sufficient band load to ensure a water-tight, leak-proof seal that is resistant to both infiltration and exfiltration.

Corrosion Resistant - AISI 304 series stainless steel components provide highly effective corrosion resistance in a variety of environments; such as marine applications, poorly aerated or moist soils, contaminated ground conditions (particularly industrial fill sites) and where the ground water contains chloride, sulfates or bicarbonates.

Withstands Tension and Compression - EPDM rubbers permit a substantial degree of distortion without change in basic physical resistance, unlike other manufacturers' thermoplastic gasket materials. Molded rubber gasket is strong, durable and resilient to ultraviolet rays, ozone, fungus growth, natural erosive properties of soil and normal sewer gases. More pliable and easier to install in cold weather applications than an elastomeric PVC gasket.

Internal "Pipe Stop" - For proper pipe positioning and noise/vibration reduction.

Joint Movement Restraint - Coupling provides for superior load bearing control between the coupling and pipe surface. The coupling's rugged construction provides excellent sealing properties, and the stainless steel band plus securing cage offers excellent resistance to shear forces and helps with alignment, while maintaining flexibility.

Pre-Set Calibration - Designed to be installed with a cordless drill to 80 in/lbs. maximum torque to accommodate the AISI 305 series stainless steel 5/16" hex head screw.